

# Dodge Ram

5.9L Cummins (2002.5-2007)  
2500 & 3500




This turbo kit features the exclusive Garrett® dual ball bearing cartridge, GT wheel aerodynamics and a water-cooled center housing

- **Stage 1** - GT3782R (759361-10)
  - Featuring an 82mm compressor wheel (with 50 trim); increased surge margin; ideal for towing. Provides the best boost response of the three stages, but with the least headroom
- **Stage 2** - GT3782R (759361-11)
  - Featuring an 82mm compressor wheel (with 56 trim); provides increased compressor flow capability over Stage 1
- **Stage 3** - GT3788R (759361-12)
  - Featuring an 88mm compressor wheel (with 52 trim); larger turbine housing A/R, increased turbine flow and compressor wheel size and flow over Stage 1 and 2. Highest horsepower potential of the three stages

Performance	Turbo	Horsepower	Torque
Stock	Stock	325	610
Stage 1	GT3782R	350	650
Stage 2*	GT3782R	450	1000
Stage 3*	GT3788R	550	1200

\* Model Year 2006 vehicle with performance chip and exhaust

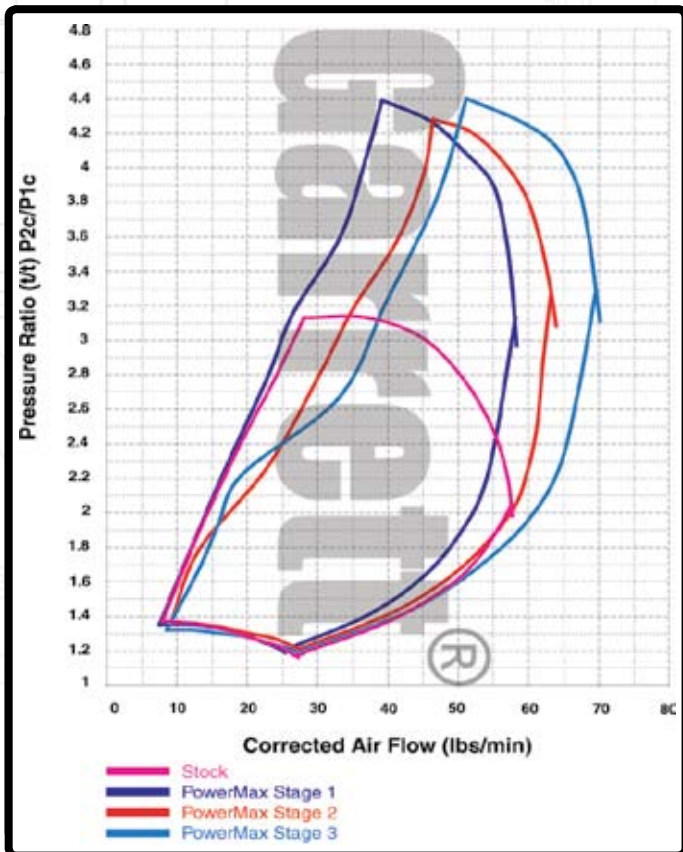

### The PowerMax™ Cummins Turbo Kit includes:

- Stage 1, 2 or 3 Turbocharger
- Oil inlet fitting kit with restrictor
- Water line kit
- Turbine inlet bolts
- Gasket kit
- Turbine outlet adapter kit
- Compressor housing clamp
- Installation instructions

